


FlocXpress™

Pipe Flocculator 盤管型化學混凝設備



套裝型盤管式化學混凝膠凝設備-含化學幫浦,pH控制與操控盤.並可銜接斜板置入式加壓浮除設備(Lamella DAF)

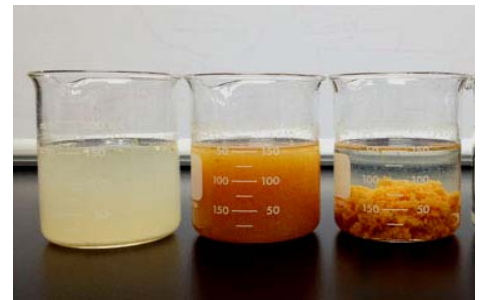


- FlocXpress 盤管型化學混凝設備:**
一套取代多槽攪拌系統的優越技術,其優點為:
- 不需設置攪拌槽與攪拌機(PAC, Alkali/Acid & Polymer),省錢,省電,省事
 - 以3套靜態攪拌管(Static Mixer)取代攪拌機,無耗電與維修保養需求
 - 包含化學混凝,膠凝與pH調整,一氣呵成,效果顯著
 - 包含混凝,膠凝效果偵測閥門,易於檢視做為藥劑量之增減依據
 - 裝置空間極小
 - 可選用套裝式,包含化學幫浦,pH sensor,pH controller 與電控盤
 - 管路材質: uPVC (或可另行指定 HDPE,SUS 304)




Ecologix Static Mixer



Flow Division



Radial Mixing

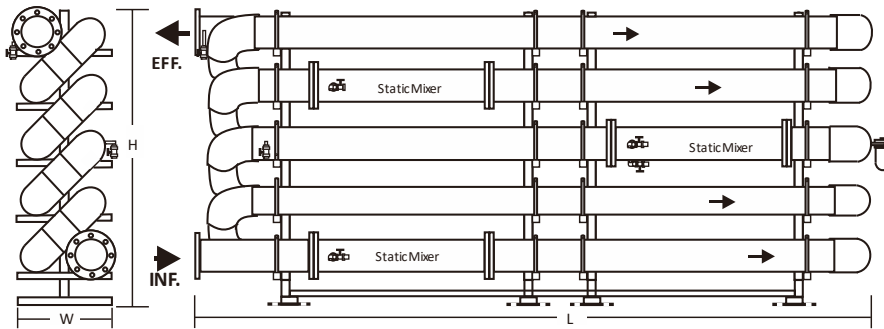

Dimension and Technical data

Model	Flow Rate, m ³ /h			Dimensions(cm)				Weight / Kgs	
	MIN.	AVG.	MAX.	L	W	H	Flange	Empty	Full
FX-10	7.0	10.0	12.0	270	51	92	2"	110	160
FX-30	26.0	30.0	37.0	445	75	110	3"	220	475
FX-60	50.0	60.0	65.0	445	85	130	4"	578	1034
FX-100	85.0	100.0	120.0	470	115	165	6"	810	1610
FX-150	125.0	150.0	170.0	483	115	165	6"	843	1950
FX-200	175.0	200.0	220.0	550	135	196	8"	1290	2720
FX-250	225.0	250.0	265.0	555	135	210	10"	1775	3750
FX-300	270.0	300.0	350.0	555	143	210	10"	1840	4360
FX-400	360.0	400.0	450.0	555	143	243	12"	2480	5680

■ Ecologix reserves the right to alter technical data and/or to modify the product without previous notice.尺寸稍有變動不另行通知
 ■ Custom size and flow rate available 依據攪拌功能成效,接受客製化生產