

Fine bubble disc diffuser

- Ecoflex-235CV
- Ecoflex-250CV
- Ecoflex-316CV
- Ecoflex-350CV




Patented U-type retaining ring, without special tools for fastening or replacement the membrane.



Patented Integrated non-return valve with airflow control orifice

Construction The materials of construction for both support dish and membrane diaphragm are non-corrosive and UV resistant. The support dish shall be upward facing convex plastic (Glass filled Reinforced Nylon-Dupont) for working without any acid dosing requirements. Patented integrated non-return valve designed for back-flow prevention while airflow is interrupted or membrane diaphragm damaged. The membrane diaphragm which covers the dish is made of high grade EPDM resistant to the usual sewage ingredients, and silicone for special chemical wastewater aeration. The membrane diaphragm shall be further fastened to the support dish with a patented U-type retaining ring, without special tools for fastening or replacement the membrane.

In the past 18 years, Ecoligix has been provided to about 15 metropolitan domestic sewage plants in South Africa, China, Iran, south East Asia, Mexico, etc., and has continued to perform superior aeration so far and more appreciated by clients.

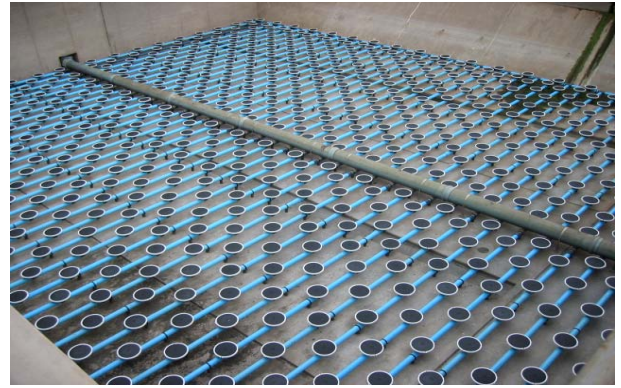

KP Clamp saddle for 2", 3", 4" & OD 90mm air header.

Technical Data

Diffuser type	Ecoflex-235CV	Ecoflex-250CV	Ecoflex-316CV	Ecoflex-350CV
Material - Membrane	Compression molded high grade EPDM; Silicone available			
-Support dish	Glass filled reinforced Nylon™, PP, ABS available			
-Retaining ring	Glass filled reinforced PP			
Diameter	9.5" (240mm)	10" (258mm)	12.5" (320mm)	14" (355mm)
Effective area	0.035m ²	0.037m ²	0.067m ²	0.079m ²
Connector-air inlet threaded	R. 3/4" NPT, male			
Airflow - Standard continuous operation	3.0~5.0m ³ /h	4.0~6.0m ³ /h	5.0~8.0m ³ /h	6.0~10.0m ³ /h
- Max. Overload/Maintenance	7.0m ³ /h	9.0m ³ /h	12.0m ³ /h	15.0m ³ /h